



photometry report

POND LIGHT / WALL WASH

TEST PROCEDURE

1. The lamp was mounted and laser aligned to the axis of the goniometer.
2. Initial reference readings were taken at 1 minute, then the lamp was allowed to stabilize for 10 minutes prior to finding half max candela power values.
HV reading @ 1 minute = 23.6 candela
HV reading @ 10 minutes = 22.6 candela
3. Readings were taken at FWHM (Full Width Half Max) to determine spread.
4. Color temp – 3671
5. Measured Voltage (At plug interface) = 14.18 AC





photometry report




POND LIGHT / WALL WASH

BEAM SPREAD

Horizontal Spread = 59° LEFT
= 55° RIGHT

Vertical Spread = 61° LEFT
= 57° RIGHT

Average Spread = 58° FOR A TOTAL SPREAD OF 116°

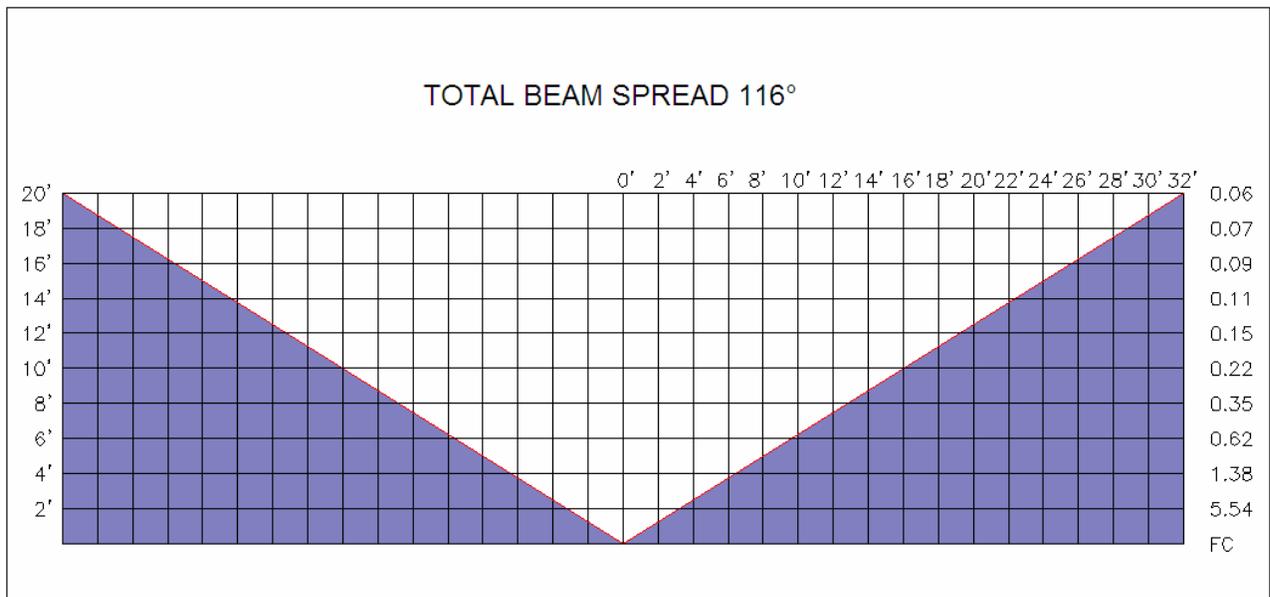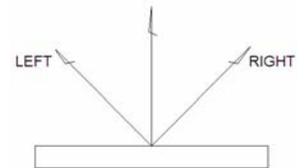

ALL READINGS WERE TAKEN AFTER THE LAMP WAS STABILIZED FOR 10 MINUTES.